

**SPECIFICATION**

Current Rating: 0.3 AMP  
 Insulation Resistance: 100MΩ Min.(Unmated)  
 10MΩ Min.(Mated)  
 Contact Resistance: 30mΩ Max.  
 Dielectric Voltage: 250V AC for one minute(Unmated)  
 150V AC for one minute(Mated)  
 Insertion Force: 4.5 Kgf  
 Extraction Force: 0.51Kgf - 2.55Kgf  
 Operation Temperature: -20°C to +80°C

**MATERIAL**

Contact: Copper Alloy  
 Insulator: Hi-Temp. Thermoplastic, UL94V-0  
 Shell: Stainless Steel

**ORDER INFORMATION**

5 H M D M 1 F - X X






D:Female D Type

G0:Gold Flash  
 GF:Au 15u"

H U - 0 1



H:T/R W/O Cap





RoHS

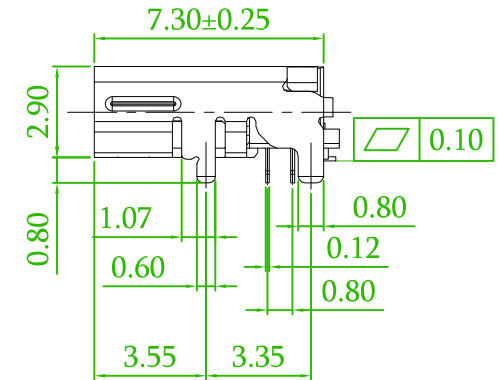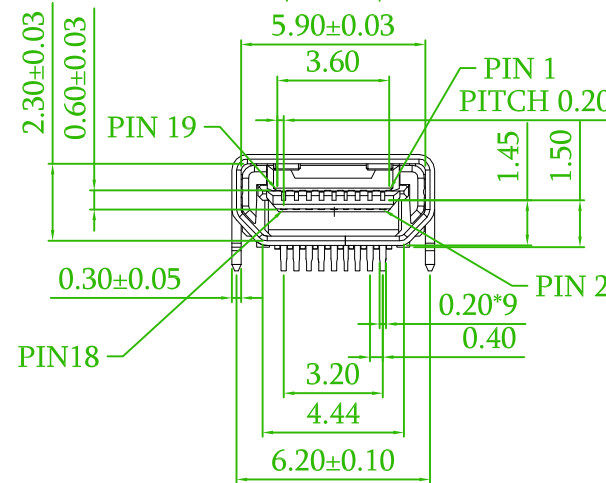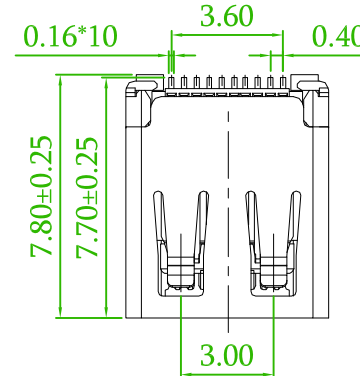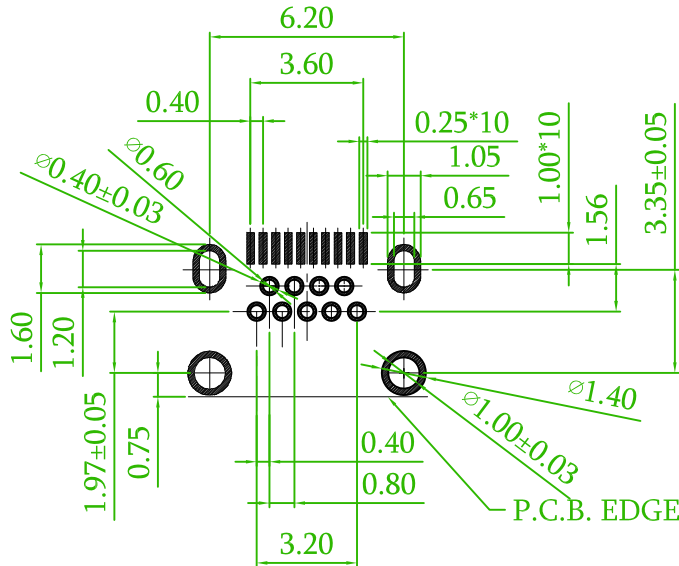

Langer Acker 32  
 30900 Wedemark  
 Germany

(+49) 5130 / 58642-0  
 info@amec-gmbh.de  
 www.amec-gmbh.de

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	HDMI D TYPE (MICRO HDMI) RECEPTACLE SHELL TAIL IS THROUGH HOLE				頁數 Page	1/2
	品號 PART NO.	5HMDM1F-XXHU-01				繪圖 DRAWN	Gary 2017/04/17
	圖號 DRAWING NO.	GN127-GA376	版本 REV.	A	核對 CHECKED	Jerry 2017/04/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/04/17	
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

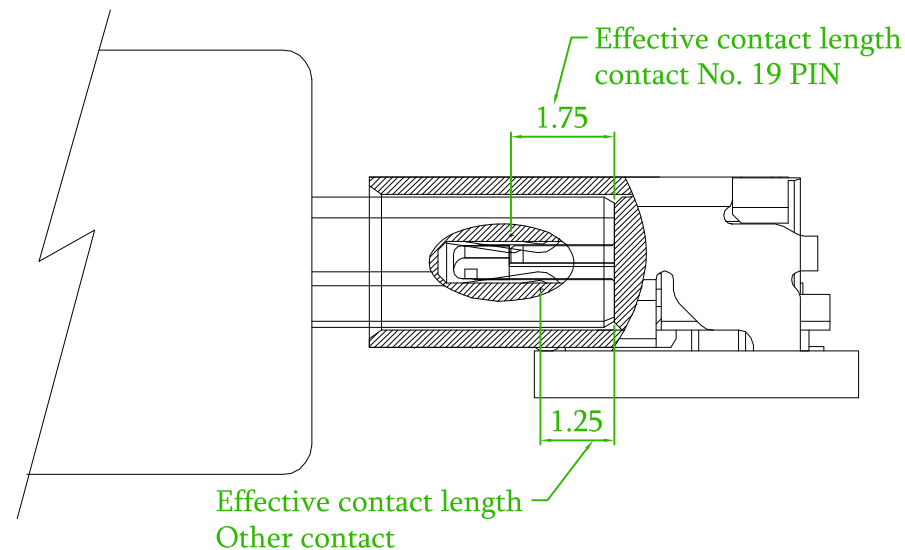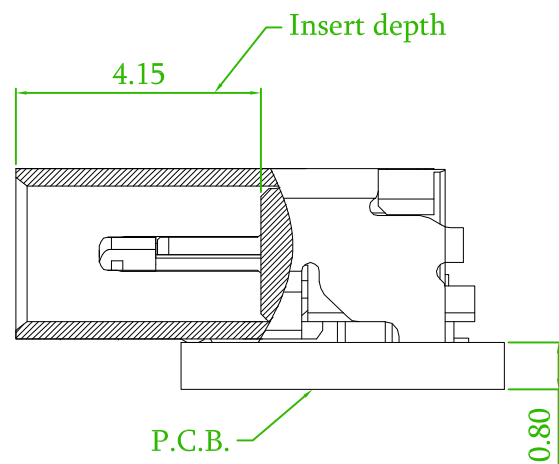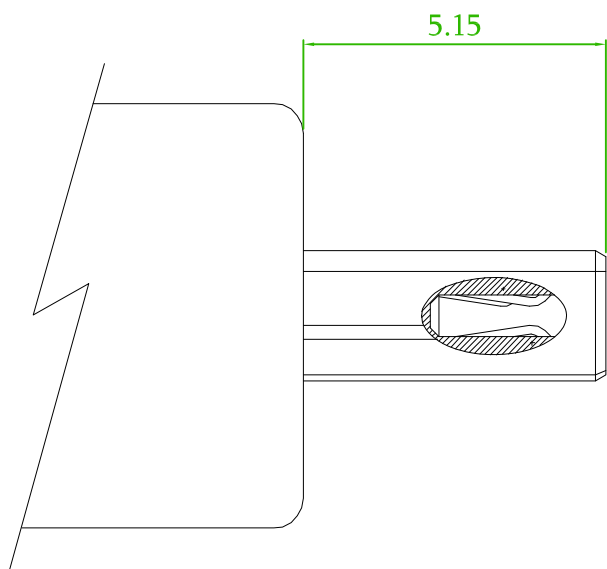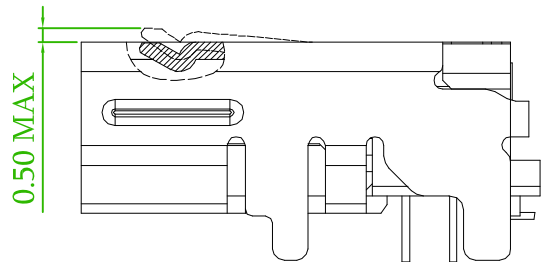

**amec**

Langer Acker 32  
30900 Wedemark  
Germany

(+49) 5130 / 58642-0  
info@amec-gmbh.de  
www.amec-gmbh.de



糧德精密有限公司  
Amtek Technology Co., Ltd.  
TEL: 886-2-2260-6878  
FAX: 886-2-2260-8030

品名 TITLE	HDMI D TYPE (MICRO HDMI) RECEPTACLE SHELL TAIL IS THROUGH HOLE				頁數 Page	2/2
品號 PART NO.	5HMDM1F-XXHU-01				繪圖 DRAWN	Gary 2017/04/17
圖號 DRAWING NO.	GN127-GA376	版本 REV.	A	核對 CHECKED	Jerry 2017/04/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/04/17	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	