
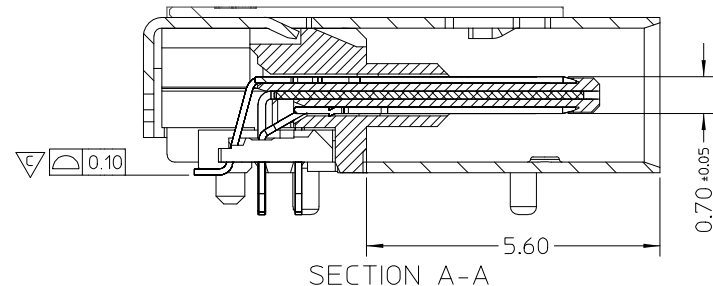
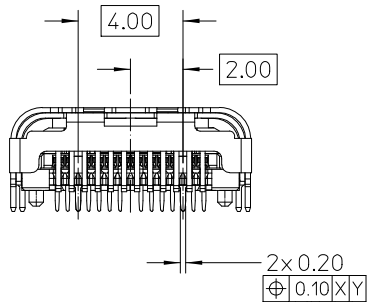
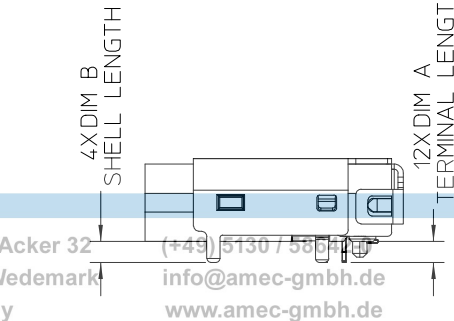
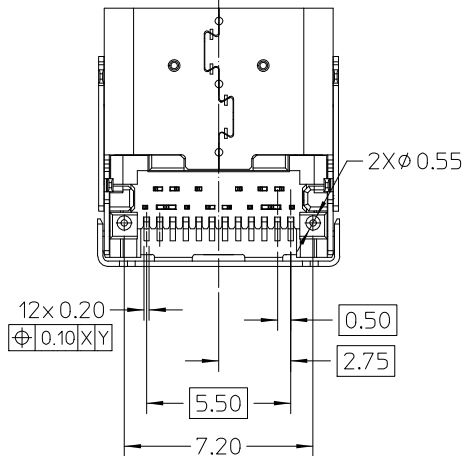
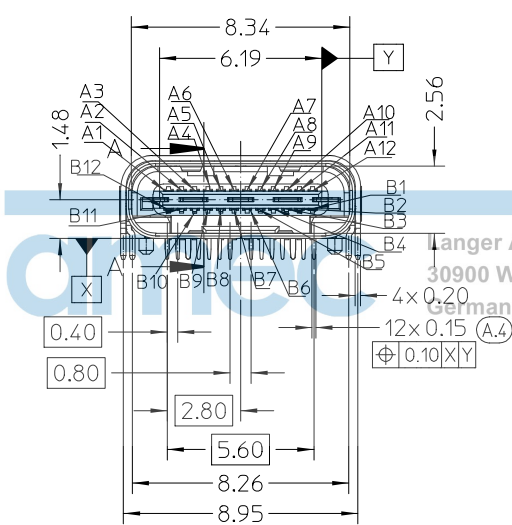
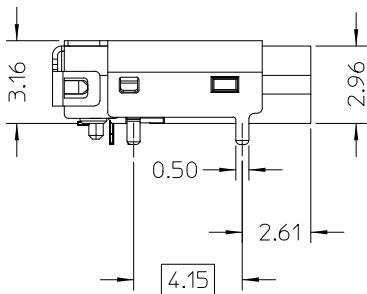
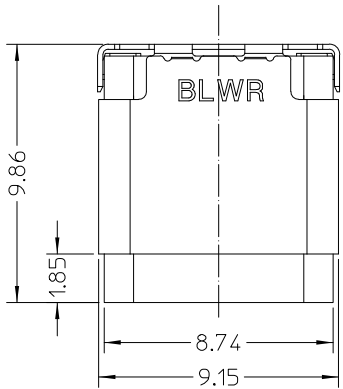


REV	ECN No.	DATE	REMARK
A	EK2015-0033	20150313	HISTORIC
A.1	EK2015-0057	20150416	HISTORIC
A.2	EK2015-0086	20150520	HISTORIC
A.3	EK2016-0228	20160713	HISTORIC
A.4	EK2017-0003	20170109	ACTIVE

PIN NO	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
PIN ASSIGN	GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
PIN ASSIGN	GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
PIN NO	B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1




工程部
2017.02.09
正式发行

工程部
2017.02.09
工程出图章

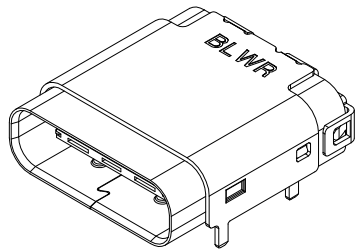


ROHS COMPLIANT LEAD&HALOGEN FREE	QUALITY SYMBOL	MATERIAL NO.:	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO Bellwether Electronic Corp. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	0	REFER TO SHEET 2	TITLE			
	1	REVIEW TABLE FOR DETAILS	USB TYPE C CONNECTOR			
	2	GENERAL TOLERANCES (UNLESS SPECIFIED)	0.50MM PITCH, 24 CIRCUITS, CH=1.48MM			
	3		STANDARD TYPE			
			Bellwether Electronic Corp.			
			DOCUMENT NO.		SHEET NO.	
			SD-80211-019		1 OF 2	
			DIMENSION STYLE		SCALE	
			MM ONLY		5:1	
			DESIGN UNITS		THIRD ANGLE PROJECTION	
			METRIC			

REV	ECN No.	DATE	REMARK
A	EK2015-0033	20150313	HISTORIC
A.1	EK2015-0079	20150515	HISTORIC
A.2	EK2015-0086	20150521	HISTORIC
A.3	EK2016-0081	20160411	HISTORIC
A.4	EK2017-0003	20170109	HISTORIC
A.5	EK2017-0086	20170321	HISTORIC
A.6	EK2017-0085	20170321	ACTIVE

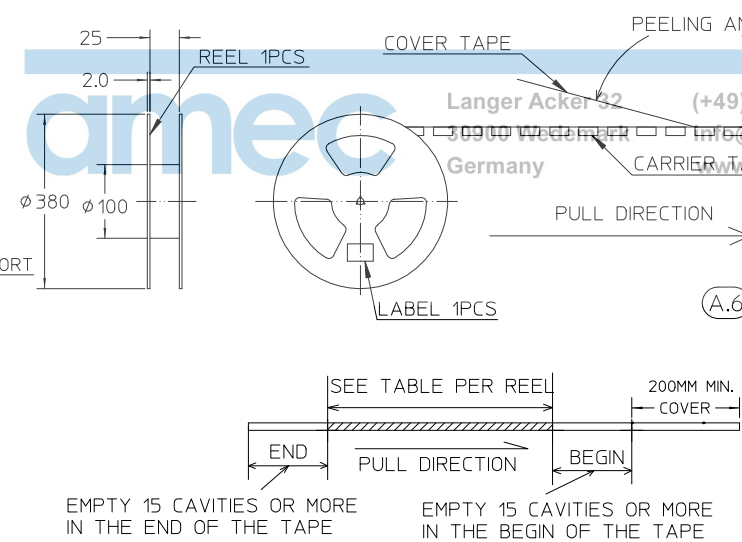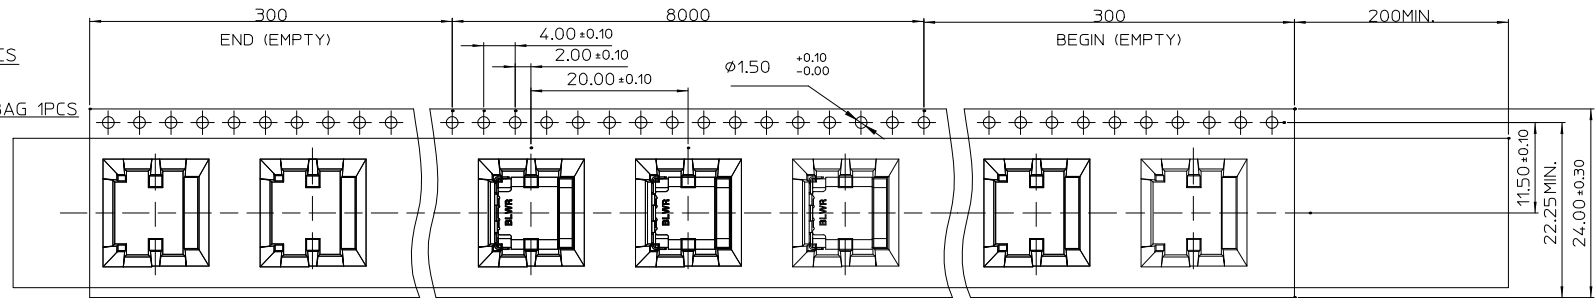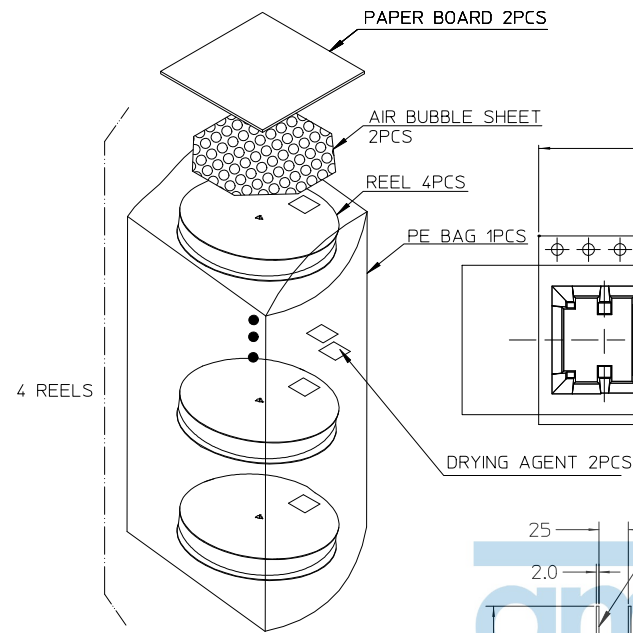

NOTES:
1. STAPLES SHOULD ONLY BE USED TO SET UP CARTON.
2. ALL CARTON CLOSURES MUST BE DONE WITH TAPE.
3. FULL PACKAGING TAPE REEL WITH THE QUANTITIES AS INDICATED IN THE CHART.

PRODUCT NUMBER	TOTAL QUANTITY PER CARTON	PART QUANTITY PER REEL	REEL QUANTITY PER CARTON
80211-102*	3600 PCS	900 PCS	4 PCS
80211-192*/80211-112*	3600 PCS	900 PCS	4 PCS
80211-782*	3200 PCS	800 PCS	4 PCS
80211-792*/80211-712*	3200 PCS	800 PCS	4 PCS
80211-882*	3200 PCS	800 PCS	4 PCS
80211-892*/80211-812*	3200 PCS	800 PCS	4 PCS

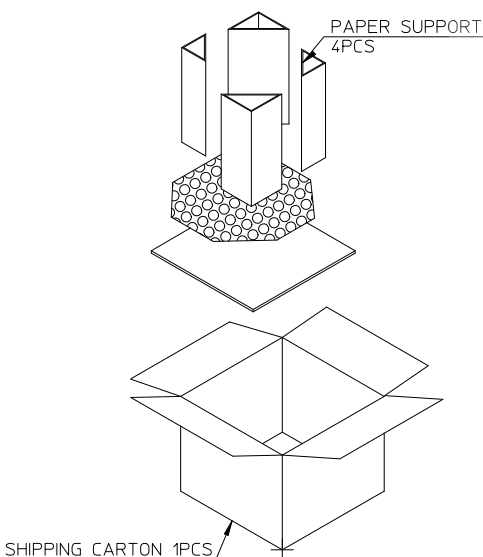

EMPTY 15 CAVITIES OR MORE IN THE END OF THE TAPE
EMPTY 15 CAVITIES OR MORE IN THE BEGIN OF THE TAPE

ROHS COMPLIANT
LEAD&HALOGEN FREE

MATERIAL NO.:

SEE TABLE

REVIEW TABLE FOR DETAILS

GENERAL TOLERANCES (UNLESS SPECIFIED)

x.xxxx	± ---
x.xxx	± ---
x.xx	± 0.25
x.x	± 0.30
ANGULAR	± --°

TITLE

USB TYPE C CONNECTOR
0.50MM PITCH,24 CIRCUITS,CH=1.48MM
STANDARD TYPE, ASSEMBLY

Bellwether Electronic Corp.

DOCUMENT NO.

PK-80211-001

DIMENSION STYLE

MM ONLY

DESIGN UNITS

METRIC

SCALE

N/A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO Bellwether Electronic Corp. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

ECN DESCRIPTION

ADD NEW PART NUMBER

DRAWN BY

SHAWN XU

DATE

20170321

CHECKED BY

RAINY ZHU

DATE

20170321

APPROVED BY

IVANOV WANG

DATE

20170321

THIRD ANGLE PROJECTION



PRODUCT DESCRIPTION:

UNIVERSAL SERIAL BUS TYPE-C RECEPTACLE AND PLUG SERIES

PRODUCT NUMBER:

80210 Series / 80211 Series

amec

Langer Acker 32
30900 Wedemark
Germany

(+49) 5130 / 58642-0
info@amec-gmbh.de
www.amec-gmbh.de

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 1 of 8
DATE: 2016 / 07/ 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang



BellWether PRODUCT SPECIFICATION

1.0 SCOPE.....	3
2.0 PRODUCT DESCRIPTION.....	3
3.0 APPLICABLE DOCUMENTS AND SPECIFICATION.....	3
4.0 RATINGS.....	3
5.0 PERFORMANCE.....	3
5.1 APPEARANCE REQUIREMENTS.....	3
5.2 ELECTRICAL REQUIREMENTS	4
5.3 MECHANICAL REQUIREMENTS.....	4
5.4 ENVIRONMENTAL REQUIREMENTS.....	6
6.0 TESTING SEQUENCE.....	7
7.0 IR PROFILE.....	8



Langer Acker 32
30900 Wedemark
Germany

(+49) 5130 / 58642-0
info@amec-gmbh.de
www.amec-gmbh.de

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 2 of 8
DATE: 2016 / 07/ 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang

TEMPLATE FILENAME: PRODUCT_SPEC REV 0.1, SHEET SIZE A4 20070830



BellWether PRODUCT SPECIFICATION

1.0 SCOPE

The Product Specification covers performance, tests and quality requirements for the USB Type-C Receptacles, Plugs.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER(S)

PRODUCT NAME: 0.50MM PITCH, USB TYPE-C RECEPTACLE AND PLUG CONNECTOR.

SERIES NUMBER(S): 80210 / 80211 series

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

See the appropriate Sales Drawings for information on dimensions, materials, plating, and markings.

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

EIA-364.

The following documents are part of this specification between the requirements of this specified herewith. In the event of conflict between the requirements of this specification and the product drawings, the product drawings shall take precedence. In the event of conflict between the requirements of this specification and reference documents, this specification shall take precedence.

amec

Langer Acker 32
30900 Wedemark
Germany

(+49) 5130 / 58642-0
info@amec-gmbh.de
www.amec-gmbh.de

4.0 RATINGS

4.1 VOLTAGE

20 Volts AC Per Contact

4.2 TEMPERATURE

Operating: - 40°C to + 80°C

5.0 PERFORMANCE

5.1 APPEARANCE REQUIREMENTS

ITEM	TEST DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Visual and dimensional inspections	Visual, dimensional and functional per applicable quality inspection plan. Per EIA 364-18	Meets requirements of product drawing. No physical damage.

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 3 of 8
DATE: 2016 / 07/ 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang



BellWether PRODUCT SPECIFICATION

5.2 ELECTRICAL REQUIREMENTS


ITEM	TEST DESCRIPTION	TEST CONDITION	REQUIREMENT
2	Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA . Measurement is made from the solder tail of the receptacle to the soldering point of the plug (including any internal paddle cards, contacts and substrates of the plug and receptacle). Per EIA-364-23B	40 milliohms ,[initial] MAX. PER CONTACT 10 milliohms MAX. (change from initial)
3	Insulation Resistance	Unmated & mated connectors: apply a voltage of 500 VDC between adjacent contacts. Per EIA-364-21	100 Megohms MIN.
4	Dielectric Withstanding Voltage	Unmated & mated connectors: apply a voltage of 100 VAC (RMS) for 1 minute between adjacent contacts. Per EIA-364-20	No Breakdown
5	Temperature Rise	Mate connectors: Apply 5.0 A to VBUS pins and 1.25A to VCONN pins with the return path through the corresponding GND pins. A minimum current of 0.25A shall also be applied individually to all the other contacts. The temperature rise above shall not exceed 30°C at any point on the mated plug and receptacle under test. The ambient condition is still air at 25°C Per EIA-364-70, Method 2	Temperature rise: +30°C MAX.

5.3 MECHANICAL REQUIREMENTS

ITEM	TEST DESCRIPTION	TEST CONDITION	REQUIREMENT
6	Insertion Force / Extraction Force	Mate connectors (male to female) at a maximum rate of 12.5 mm per minute . (this requirement does not apply when the connectors are used in a docking application) Per EIA-364-13	Insertion force : 5-20N Extraction force : 8-20N up to 1,000 mating cycles and within the range of 6 N to 20 N
7	Durability	10,000 cycles at a maximum rate of 200 cycles per hour . Per EIA-364-09	No physical damage.
8	Cable Flexing	Flexing occur to the cable assembly with Dimension X=3.7 times the cable diameter and 100 cycles in each of two planes. Per EIA 364-41, Condition 1	No physical damage & Discontinuity 1 µs MAX.

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 4 of 8
DATE: 2016 / 07 / 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang

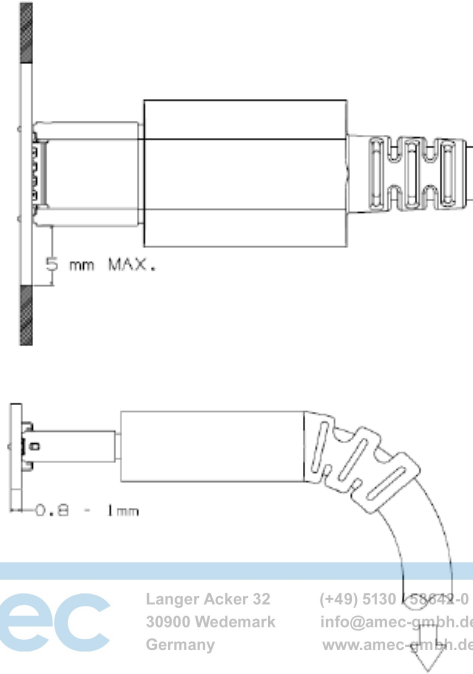

9	Cable Pull-out	Apply a 40N axial load to cable assembly for a minimum of 1 minute while clamping one end of the cable plug. Per EIA 364-38, Method A	No physical damage
10	4-Axis Continuity Test	<p>The connector family shall be tested for continuity under stress using the test configurations shown in following figure.</p>  <p>amec Langer Acker 32 (+49) 5130 53642-0 30900 Wedemark info@amec-gmbh.de Germany www.amec-gmbh.de</p> <p>Apply an 8N tensile force to the cable in a direction of perpendicular to the axis of insertion for 10 seconds at least. Measure the continuity across each contact and conform that each non-ground contact shall not short to the shell during the stresses. Repeat the test for 90 degree, 180 degree and 270 degree rotations.</p>	Discontinuity 1 μ s MAX. & Non-ground contact not any shorting to the shell
11	Wrenching Strength	Apply a perpendicular force to a plug when inserted at a distance of 15mm from the edge of the receptacle. The force shall be applied in all four directions (i.e., left, right, up, and down).	0-50N No plug or receptacle damaged 50-75N The plug may be damaged, No damage in receptacle
12	Vibration	Amplitude: 1.52mm p-p Sweep time: 50-2000-50 Hz in 20minute. Duration: 12 times in each X, Y, Z. Axes. Electrical load: DC 100 mA current shall be flowed during the test Per EIA-364-28 Condition III	Discontinuity 1 μ s MAX. & No physical damage & 10 milliohms MAX. (change from initial)

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 5 of 8
DATE: 2016 / 07 / 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang



13	Shock (Mechanical)	Mate connectors and shock at 50 g's with ½sine wave (11 milliseconds) , 3 strokes in the ±X, ±Y, ±Z axes Per EIA-364-27, Condition A	Discontinuity1 µs MAX. & No physical damage & 10 milliohms MAX. (change from initial)
----	-------------------------------	--	--

5.4 ENVIRONMENTAL REQUIREMENTS

ITEM	TEST DESCRIPTION	TEST CONDITION	REQUIREMENT
14	Thermal Shock	Mate connectors to follow condition for 10 cycles. 1 cycles a). -55 +0/-3 °C , 30 minutes b)+25+10/-5 °C , 5 minutes MAX. c). 85 +3/-0 °C , 30 minutes d) +25+10/-5 °C 5 minutes MAX. Per EIA-364-32D, Test condition I	No physical damage & 10 milliohms MAX. (change from initial)
15	Cyclic temperature and Humidity	Mate connectors to cycle the connector between 25 °C±3 °C at 80 % ±3 % RH and 65 °C±3 °C at 50 % ±3 % RH . Dwell time of 1.0 hour; ramp time of 0.5 hours. 24 cycles Per EIA-364-31B	No physical damage & 10 milliohms MAX. (change from initial)
16	Temperature life	Mate connectors to expose to 105 ±2 °C for 120 hours. Upon completion of the exposure period, the test specimens shall be conditioned at ambient room conditions for 1 to 2 hours, after which the specified measurements shall be performed. Per EIA-364-17B, Test condition A	No physical damage & 10 milliohms MAX. (change from initial)
17	Salt Spray	The mated connectors shall be exposed to the following salt mist conditions. At the completion of the exposure period, salt deposits shall be removed by a gentle wash or dip in running water, after which the specified measurements shall be performed. NaCl solution concentration: 5±1%, Spray time: 48 hours, Temperature:35±2°C. Per EIA-364-26B condition B	No physical damage & 10 milliohms MAX. (change from initial)
18	Solder Heat for Rework/Repair	Connector to withstand PCB solder/re- solder operation with hand held solder iron at temperature of 350°C minimum for a dwell time of at least 3sec	No mechanical degradation
19	Solder Resistance	Receptacle connector: 2 cycles for IR process (refer to 7.1 for profile.)	No physical damage or discoloration of connector materials.

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 6 of 8
DATE: 2016 / 07 / 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang



6.0 TESTING SEQUENCE

6.1 TEST GROUP

Test or Examination	Test Group							
	A	B	C	D	E	F	H	J
	Test Sequence							
Examination of Product	1,6	1,8	1,12	1,8	1,6	1,3	1,3	1,3
Contact Resistance (Low Level)	2,5	2,5,7	2,7,9	2,7	2,5			
Dielectric Withstanding Resistance			3,10					
Insulation Resistance			4,11					
Temperature Rise							2	
Insertion Force / Extraction Force				3,5				
Durability	3	3	5	4				
Cable Flexing								
Cable Pull-out								
4-Axis Continuity Test								2
Wrenching Strength						2		
Vibration					3			
Shock (Mechanical)					4			
Thermal Shock		4	6					
Cyclic temperature and Humidity		6	8					
Temperature Life	4							
Salt Spray				6				
Sample Size	5	5	5	5	5	5	5	5

REVISION:

1

ECR/ECN NUMBER:

EK2016-0203

DOCUMENT NUMBER

PS-80210-001

SHEET No.

7 of 8

DATE:

2016 / 07 / 03

CREATED / REVISED BY:

Kaysen Chen

CHECKED BY:

Jerry Wang

APPROVED BY:

Jerry Wang




BellWether PRODUCT SPECIFICATION

7.0 IR PROFILE

Recommended Reflow Pre-Solder Process and Profile.

Actual reflow profile also depends on equipment, solder paste, PCB thickness, and other components on the board. Please consult your solder paste & reflow equipment manufacturer for their recommendations to adopt a suitable process.

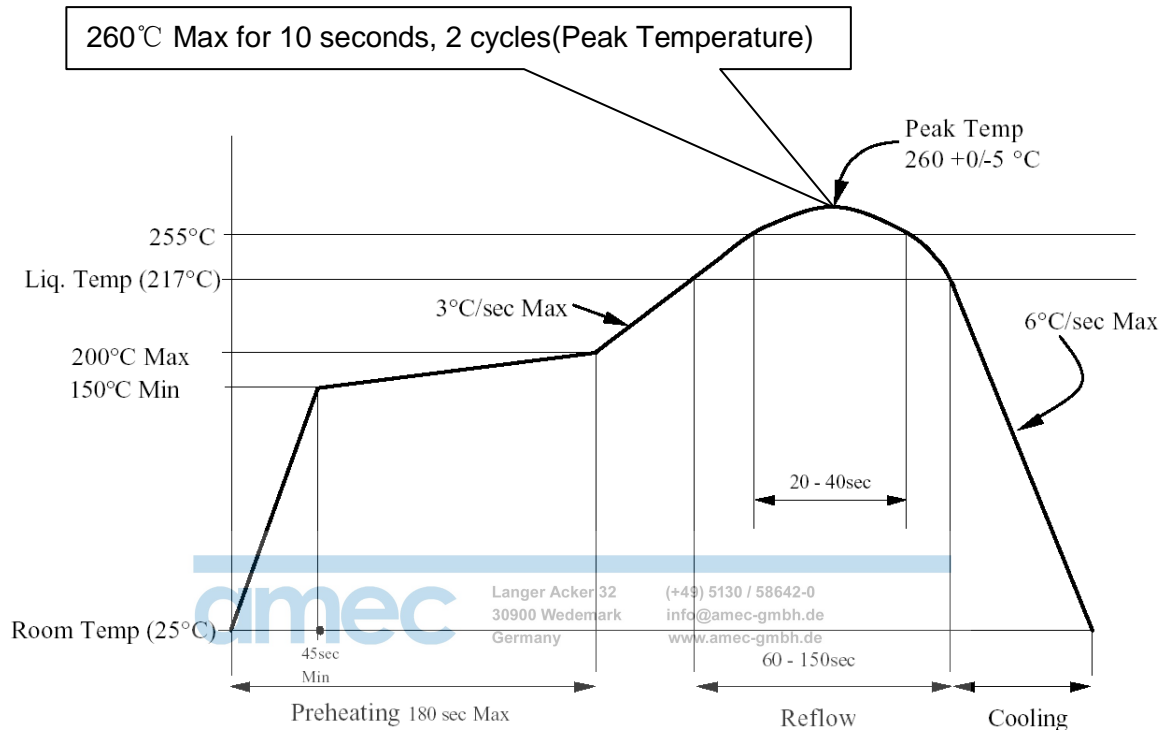

LEAD-FREE PROFILE FOR PEAK REFLOW - 260°C

Notes:

1. Reflow solder Preheat at 3°C/s to 150°C.
2. Reflow at 255°C for 30s per figure.
3. Peak temperature to be at 260 ± 0/-5°C.

REVISION: 1	ECR/ECN NUMBER: EK2016-0203	DOCUMENT NUMBER PS-80210-001	SHEET No. 8 of 8
DATE: 2016 / 07 / 03	CREATED / REVISED BY: Kaysen Chen	CHECKED BY: Jerry Wang	APPROVED BY: Jerry Wang