


Profile of wave solder:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2016-03-29	

SUGGESTED PROFILE OF WAVE SOLDER FOR ROHS PRODUCT

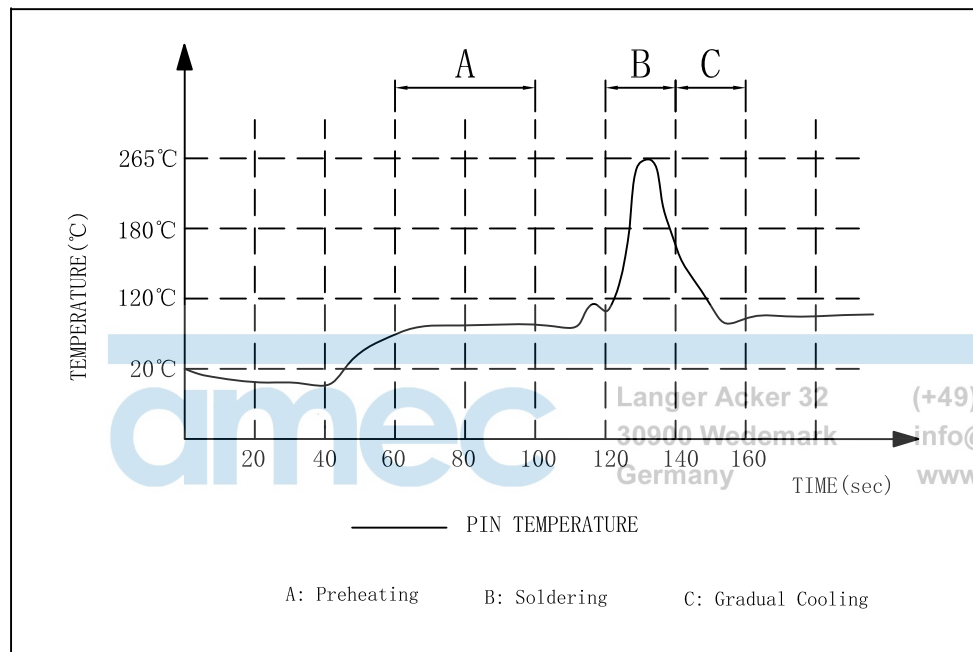


- (1) Tip Temperature: 265°C max
 - (2) Tip Temperature time: 5sec max
- Note: The melting point of Tin: 219°C

X:X ±0.25	APPD:	Trxcom Huizhou Trxcom Electronics Co., Ltd.
X:XX ±0.20	CHKD:	
X:XXX ±0.05	DR: SEA	
ANGLES ±1°	UNIT: mm	TITLE: RJ45 Connector with 1000 Base-T Integrated Magnetics For PoE Application
		PART NO. : TRJK2072AONL
	SCALE: 2/1	SHEET: 2/4
	REV: A	DWG NO. : TRC16032916

Packaging:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2016-03-29	

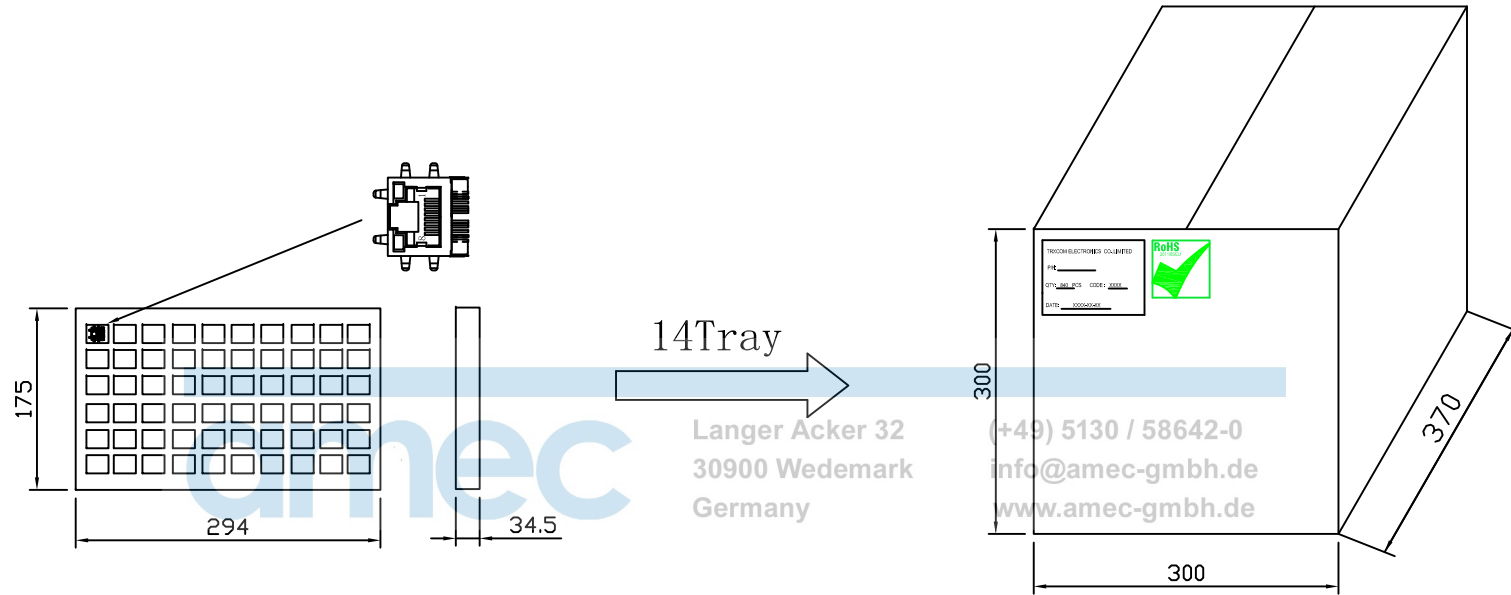

- ◆ Packaging unit :60pcs/tray
- ◆ Packaging material:PVC
- ◆ Outer carton unit:840pcs/14tray/box
- ◆ Net Weight:7kg
- ◆ Gross Weight:9kg

X:X	±0.25	APPD:	Trxcom
X:XX	±0.20	CHKD:	
X:XXX	±0.05	DR: SEA	TITLE: 1*1 33.02 RJ45 PACKING
ANGLES	±1°	UNIT: mm	PART NO.: TRJK2072AONL
	SCALE: 2/1	SHEET: 4/4	REV: A
			DWG NO.: TRC16032916